
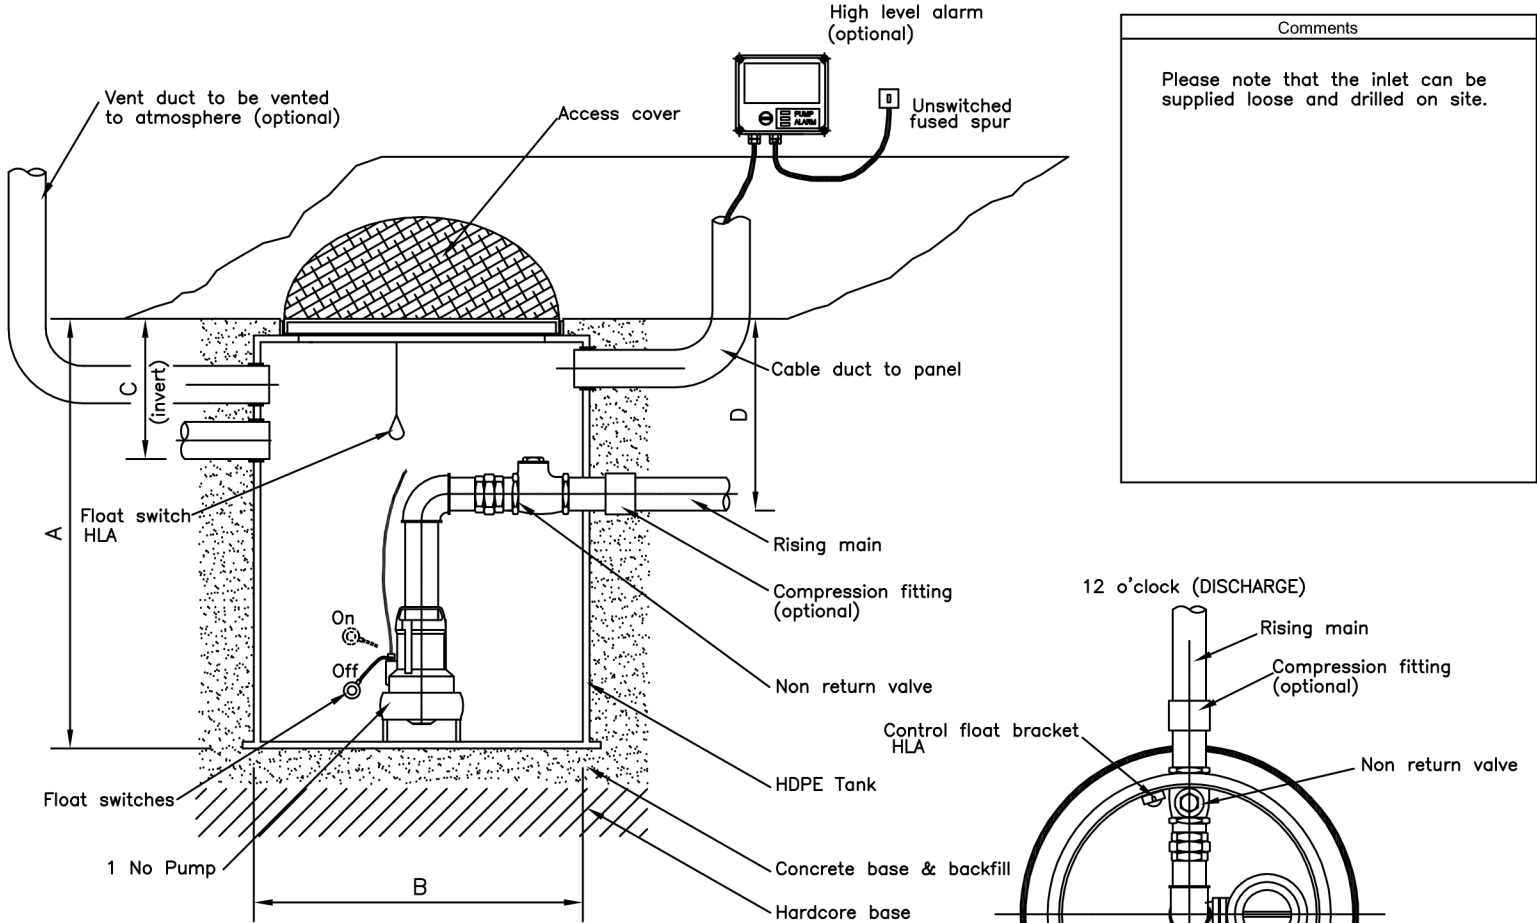



TECHNICAL SPECIFICATION	
Power supply	230v /415V
Motor rating	250W
Frequency	50HZ
Revolutions per min.	3000
Max. vertical output	10m
Max. horizontal output	200m
Max. flow rate	500 l/min.
Max. liquid temperature	40 deg. C
Discharge size	1.25" pipe
Cable length	10m

ACCESS COVER (CLEAR OPENINGS)	
DIAMETER (mm)	TYPE
450	Pedestrian

FABRICATION SPECIFICATIONS				
ITEM	INDEX	DEPTH (mm)	DIAMETER (mm)	CLOCK FACE POSITION
Tank depth	A	1000		
Tank ø	B		610	
Inlet	C1	250	110	
Inlet	C2			
Inlet	C3			
Discharge	D	200	63	12
Cable duct			40	
Vent				

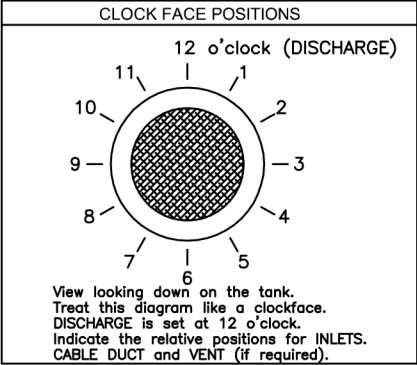

SIDE ELEVATION

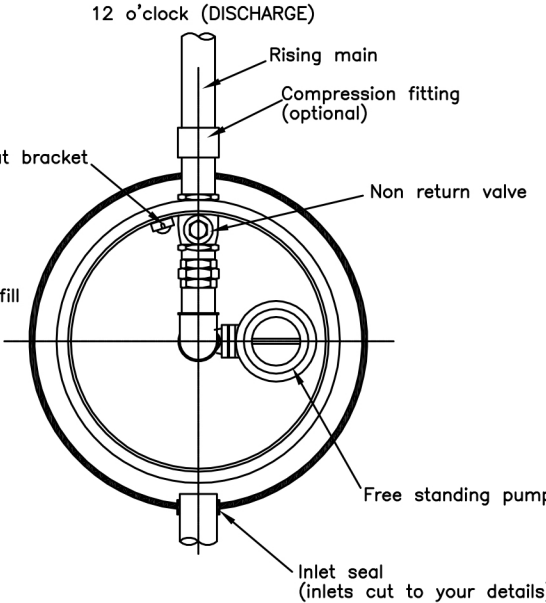

PLAN VIEW

PLEASE NOTE THAT THIS DOCUMENT MUST
BE READ IN CONJUNCTION WITH THE
INSTALLATION & OPERATING GUIDELINES.

DRAWING NOT TO SCALE

Customer.		Drawing No.	
Project.		Date.	
Project address.		Drawn by.	
		Checked by.	



Sumps & Pumps Direct Ltd, Cinnamon House,
88 Cinnamon Lane, Fearnhead,
Cheshire,WA2 0AW,